


CLOSED WEDGE SOCKETS

QUENCHED AND TEMPERED CAST STEEL

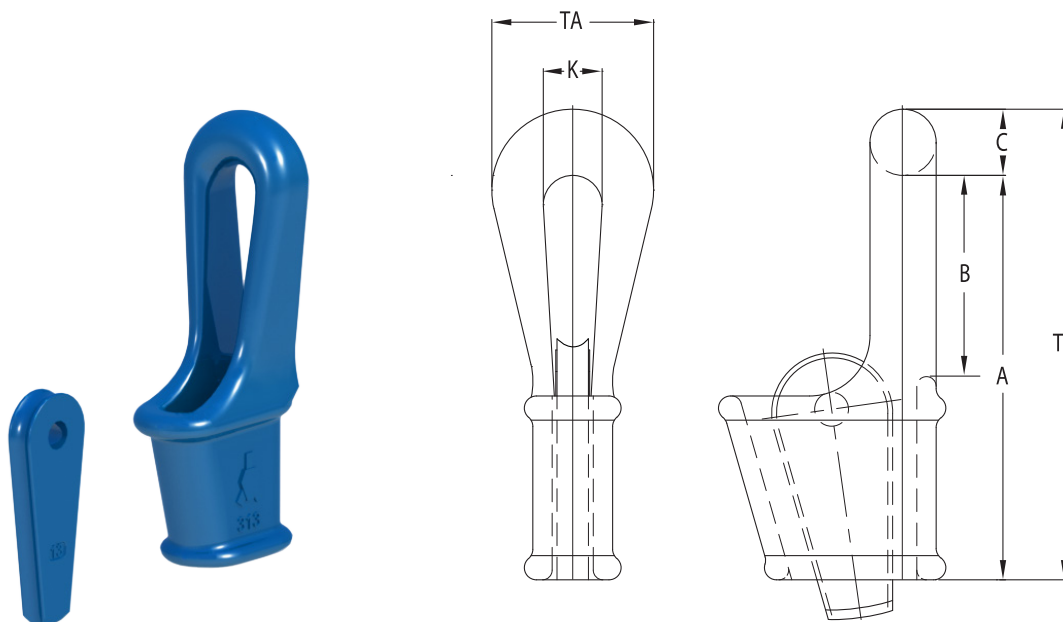

Model nr.	MBL (Mtons)	for wire ø		Dimensions (mm)									Weight (kg)
		(mm)	(inch)	A	B	C	K	TA	TL	WH	WB	WD	
CWS 303	40	18-19	$\frac{3}{4}$	220	100	34	40	90	254	160	70	21	7
CWS 304	55	20-22	$\frac{7}{8}$	225	125	42	47	110	267	187	77	24	9
CWS 305	75	24-26	1	290	130	50	55	125	340	212	83	28	14
CWS 306	90	27-29	$1\frac{1}{8}$	325	145	60	70	152	385	232	91	30	22
CWS 307	110	30-32	$1\frac{1}{4}$	360	160	68	75	165	428	266	108	33	30
CWS 308	125	34-36	$1\frac{3}{8}$	400	180	68	75	165	468	298	116	35	38
CWS 309	150	37-39	$1\frac{1}{2}$	500	240	72	80	185	572	338	130	38	49
CWS 310	170	40-42	$1\frac{5}{8}$	600	310	80	90	210	680	373	140	41	65
CWS 311	225	43-48	$1\frac{3}{4} - 1\frac{7}{8}$	640	325	90	100	225	730	408	146	48	83
CWS 312	280	49-52	2	720	375	100	110	245	820	450	160	53	150
CWS 313	360	54-58	$2\frac{1}{4}$	775	400	110	120	265	885	470	168	58	160
CWS 314	425	61-64	$2\frac{1}{2}$	900	470	125	130	300	1025	500	176	65	230
CWS 315	460	72-76	3	1000	425	130	150	330	1130	550	244	70	360
CWS 316	625	81-86	$3\frac{1}{8} - 3\frac{1}{4}$	1125	525	135	165	360	1260	670	260	80	460

MBL = Minimum Breaking Load

- The standard finish of our sockets is blue. Hot dipped galvanized is also available.
- All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
- Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges).
- Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance.
- Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.

