©2021-01

## STANDARD REEVE CRANE BLOCKS

## 5 SHEAVES

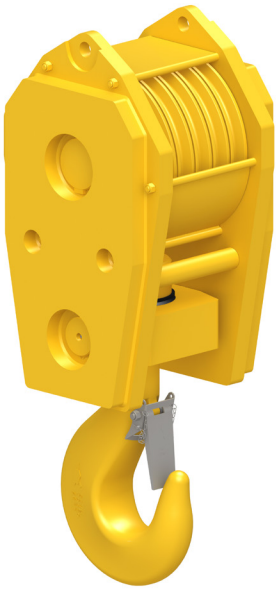

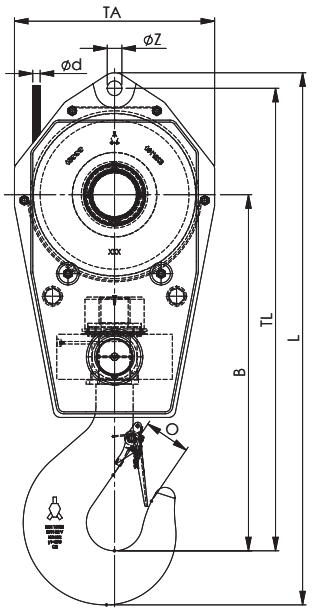


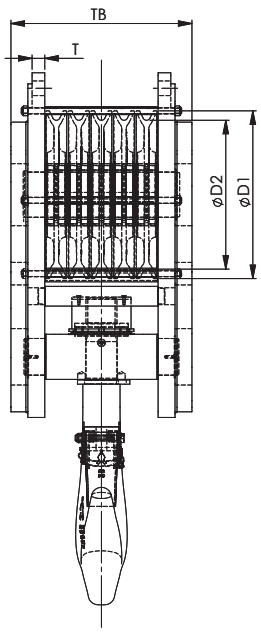




- Ramshorn hook
- Ramshorn hook form B
- Quad hook
- Shackle stud eye

| Model Nr. | WLL (Mtons) | For wire ød (mm) | Hook size | Dimensions (mm) | | | | | | | | | | Weight (kg) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | øD1 | øD2 | B | O | TA | TB | TL | L | T | øZ | |
| SRB 355.16.5.50.E | 50 | 16 | 12 | 410 | 355 | 838 | 97 | 500 | 442 | 1133 | 1305 | 28 | 32 | 500 |
| SRB 360.19.5.63.E | 63 | 19 | 16 | 410 | 360 | 992 | 97 | 500 | 438 | 1198 | 1375 | 35 | 37 | 600 |
| SRB 360.19.5.80.E | 80 | 19 | 20 | 410 | 360 | 992 | 110 | 500 | 538 | 1282 | 1477 | 35 | 37 | 820 |
| SRB 400.19.5.80.E | 80 | 19 | 20 | 460 | 400 | 1034 | 110 | 570 | 542 | 1364 | 1564 | 40 | 37 | 835 |
| SRB 400.22.5.80.E | 80 | 22 | 20 | 460 | 400 | 1034 | 110 | 570 | 542 | 1364 | 1564 | 40 | 43 | 835 |
| SRB 450.22.5.80.E | 80 | 22 | 20 | 515 | 450 | 1073 | 110 | 600 | 555 | 1431 | 1631 | 40 | 43 | 1025 |
| SRB 450.24.5.100.E | 100 | 24 | 25 | 515 | 450 | 1128 | 132 | 600 | 555 | 1486 | 1716 | 45 | 52 | 1120 |
| SRB 450.26.5.100.E | 100 | 26 | 25 | 515 | 450 | 1128 | 132 | 600 | 555 | 1486 | 1716 | 45 | 52 | 1120 |
| SRB 528.24.5.125.E | 125 | 24 | 32 | 595 | 528 | 1263 | 137 | 710 | 642 | 1696 | 1946 | 45 | 52 | 1820 |
| SRB 528.26.5.125.E | 125 | 26 | 32 | 595 | 528 | 1263 | 137 | 710 | 642 | 1696 | 1946 | 45 | 52 | 1820 |
| SRB 528.28.5.125.E | 125 | 26 | 32 | 595 | 528 | 1263 | 137 | 710 | 642 | 1696 | 1956 | 50 | 59 | 1850 |
| SRB 528.28.5.160.E | 160 | 28 | 40 | 595 | 528 | 1406 | 167 | 710 | 562 | 1796 | 2078 | 50 | 59 | 1820 |
| SRB 670.28.5.200.E | 200 | 28 | 50 | 760 | 670 | 1641 | 188 | 870 | 802 | 2131 | 2437 | 50 | 59 | 3560 |
| SRB 670.32.5.200.E | 200 | 32 | 50 | 760 | 670 | 1641 | 188 | 870 | 802 | 2131 | 2442 | 60 | 66 | 3560 |

Minimum Ultimate Strength = 4 x WLL

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Optional: Hook locking pin.

WARNING
SEE OUR WARNING & SAFETY INFORMATION